

# Xpelair GX6, GX9 & GX12

Commercial duty exhaust fans




## The Range

GX6, GX9 and GX12 window fans have remained a byword for commercial wall and window fans for over forty years. Supplied with longer ladder strips for ease of installation and includes a safety finger-guard integrated into the housing and window grille. On GX9 and GX12 units, a tamper-proof positive plug and socket assembly provides a means of isolation for service access. Installation in single and sealed double glazed windows (up to 25mm) is rapid using Xpelair's unique metal ladder strip /screw system, ensuring a secure and watertight seal against the glass. Both the GX9 and GX12 units are reversible and now feature totally enclosed external rotor motors providing constant volume outputs, even in gusty external conditions. Pre-balanced sickle bladed impellers eliminate 'fan judder' and ensure quiet trouble free operation. Sealed for life maintenance free bearings ensure suitability for running at any angle. Running costs are impressively low, and when not in use the silent electro-thermal shutter cassette closes silently against backdraughts.

GX6 Range

GX9, GX12 Range

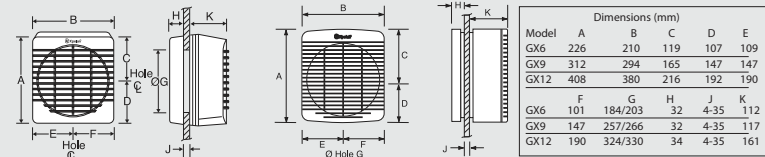

NOTE: VN360 conversion to GX6 available PT# XPEVNRPK

## Key Features

- Three sizes are available 150mm (6"), 225mm (9") and 300mm (12")
- The GX range has an electrothermal shutter cassette
- GX6 high performance extract only ventilation unit
- GX9 & GX12 are reversible and speed controllable

## Models

### XPEGX6

High performance extract axial ventilation unit  
Operated by remote On/Off switch (supplied separately)  
Suitable for single and sealed double glazed windows and panels up to 25mm

### XPEGXC6

As per GX6 with pull cord operated switching and shutter control

### XPEGX9

High performance extract axial ventilation unit  
Operated by remote On/Off switch (supplied separately)  
Suitable for single and sealed double glazed windows and panels up to 25mm

### XPEGXC9

As per GX9 with pull cord operated switching and shutter control

### XPEGX12

High performance extract axial ventilation unit  
Operated by remote On/Off switch (not supplied)  
Suitable for single and sealed double glazed windows and panels up to 25mm

**Accessories & Controllers - pages 28 and 29**

XPIRA

FR22/30

XRH

XCC1

EC6H

Product Selector		GX6	GXC6	GX9	GXC9	GX12
Reference number		90800AW	90850AW	89994AW	89995AW	90012AW
Remote switch (supplied separately)		■		■		■
Select intake, extract or controller operation				■		■
Speeds		1	1	2*	1	2*
Extract performance (FID, m <sup>3</sup> /h)	high/low	266	266	728/618	549	1614/1214
Extract performance (FID, l/s)	high/low	74	74	202/172	153	448/337
Intake performance (FID, m <sup>3</sup> /h)	high/low			456/412		1002/819
Intake performance (FID, l/s)	high/low			127/114		278/228
Sound pressure level (dB(A)@ 3m)	high/low	37	37	50/48	44	55/50
Max. electrical power rating (W)		30	30	41	32	85
Hole diameter (mm)		184	184	257	257	324
Hole diameter with wall liner (mm)		203	203	266	266	330
Weight (kg)		1.9	1.9	4	3.9	7.9
Guarantee (years)		2	2	2	2	2

\*low speed only applies if fan used with FR22/30 controller. If controller not used fan is only single (high) speed