

DX200T & DX400T

Centrifugal extract and condensation control fans



Key Features

- DX Series extract condensation control centrifugal fans
- Adjustable run-on timer (30 seconds - 20 mins)
- 'QuickVisit' delay feature on multi-speed timer models (2 mins)
- Automatic air operated backdraught shutter fitted
- Can be surface or recess mounted
- Totally enclosed maintenance free for life motors
- Clip-off front cover for ease of cleaning and maintenance
- IPX5 rated

The Range

The DX200 and DX400 pressure developing centrifugal fans are sleekly styled and are ideally suited for use in kitchens, utility rooms, bathrooms, toilets and individual offices. They can be surface or flush mounted in walls and ceilings using the universal mounting accessories provided, and include a backdraught shutter and outlet grille. Features a delay start 'QuickVisit' facility preventing the fan from coming on should the light be switched On and then Off within 2 mins. The DX200T can be window mounted using the "glass mounting" kit PT# GMK.

Models

XPEDX200T



XPEDX400T

Accessories & Controllers - pages 28 and 29

XRH

XPIRA

MOS

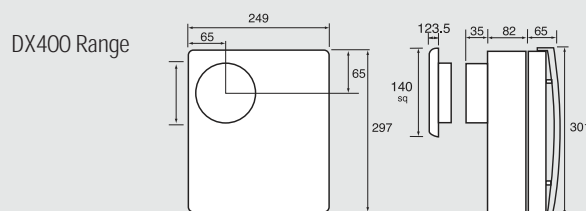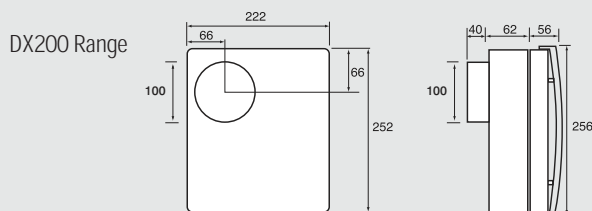

Product Selector		DX200T	DX400T
Reference number		91014AW	91084AW
Speeds		4	3
Trick ventilation facility		■	■
Electrical power rating (W)		34	78
Hole diameter			115
IP rating		IPX5	IPX5
Weight (kg)		1.75	3
Guarantee (years)		2	2
Extract Performance (FID, m ³ /h)	boost		
	speed 3		
	speed 2	79	245
	speed1	50	143
	trickle	36	61
Extract Performance (FID, l/s)	boost		
	speed 3	30	
	speed 2	22	68
	speed1	14	40
	trickle	10	17
Sound Pressure (dB(A)@ 3m)	boost		
	speed 3	50	
	speed 2	42	55
	speed1	32	42
	trickle	26	27