

Xpelair ScreenHeat


High level wall heaters



The Range

ScreenHeat range of fan powered wall heaters provide the ideal solution for draught exclusion. When mounted on the inside of an external door. In summer, they can also be switched to run-only with the fan to form a barrier against incoming dust and provide a refreshing breeze. ScreenHeat is designed for fast installation with two keyhole-slot brackets providing complete flexibility of adjustment from vertical to horizontal. Easily accessible switches allow the option to run the unit on fan only or at half or full heat output.

ScreenHeat Range

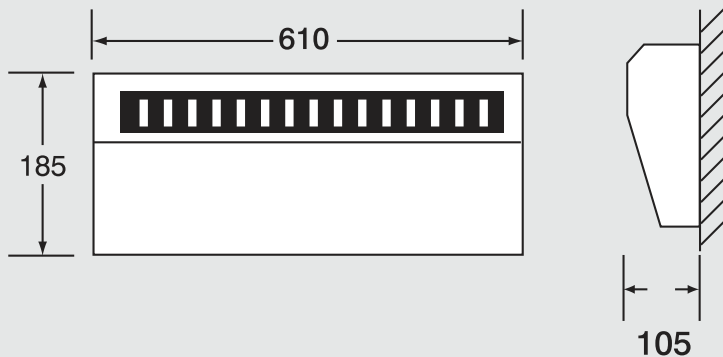

Key Features

- Easily accessible control switches
- Two keyhole-slot brackets provided for fast installation
- Suitable for either vertical or horizontal installation
- Open coil heater elements supported by ceramic insulators

Models

XPESH3

Wall heater | Two heat outputs: 1.5kW, and 3kW | High volume throughput 250m³/h | Smooth running, shaded pole motor, with greased for life bearings and safety thermal overload protection | Heater element is of open coil design supported by ceramic insulators | The heater has a separate thermal cut-out | Integral switching for ease of installation | Zinc coated steel powder coated body | Two mounting brackets which can be fitted prior to main case | Brackets allow the unit to be rotated from vertical to horizontal | Tangential blower | White/grey finish

XPESH4.5

Features over the ScreenHeat 3
Two heat outputs - 2.25kW and 4.5kW

Product Selector	ScreenHeat 3	ScreenHeat 4.5
Reference number	91469AW	91470AW
Integral control	■	■
Electrical power (kW)	3	4.5
No. of heat settings	2 & fan only	2 & fan only
Air delivery (m ³ /h)	250	250
Air delivery (l/s)	69	69
Colour	white/grey	white/grey
Weight (kg)	5.44	5.44
Guarantee (years)	1	1