

Xpelair XIL & XXS inline fans

Inline axial extract fan systems for shower cubicles



The Range

XIL fans are available in sizes of 100 & 150mm and are only available as fan systems. The systems contain all the components necessary for a normal installation, comprising: inline fan, 3m of flexible duct, internal white ceiling grille, Outside soffit/wall grille. Humid or moist air will be ducted away via a neat grille installed directly over the shower to the external grille outside, typically in the soffit.

Key Features

- Two model range, 100mm and 150mm system kits
- Operated by a remote switch/pullcord or a flow switch on the shower water supply
- Lubricated for life, maintenance free motors with thermal cut-out protection
- IPX2 rated

Models

XPEXIL150

Single speed inline shower fan system | Operated by remote switch

XPEXXS100PK


Single speed inline fan unit only | Operated by remote switch or sensor

Accessories & Controllers - [pages 28 and 29](#)

XRH

DT20B

XIL range

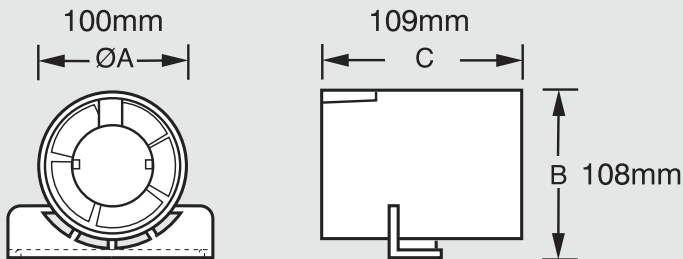

Product Selector	XXS100PK	XIL150
Reference number	90331AW	91244AW
Electrical power rating (W)	29	25
Extract performance (m ³ /h*)	95FID	133
Extract performance (l/s)	26FID	37
Sound pressure level (dB(A)@ 3m)	33	45
Duct diameter (mm)	100	150
Hole diameter (mm)	115	165
IP rating	IPX2	IPX2
Weight (kg)	0.8	2.1
Guarantee (years)	1	1

*XXS fan only performance measured FID, XIL fan systems measures in typical installation (comprising 90° bend on the inlet and outlet plus 3m of duct).